

HM形・H形

横 三 段 形
電動機直結形・両軸形

(HM005-4999 ~ HM3-6393)
(H 005-4999 H 3-6393)

サイクロ減速機

寸 法 図

ご注文主 殿

ご注文番号


見積番号

台 数 台


C-6010

H 形

⑨～⑯項の寸法図

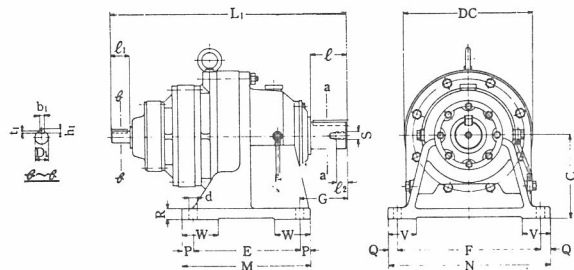


HM 形

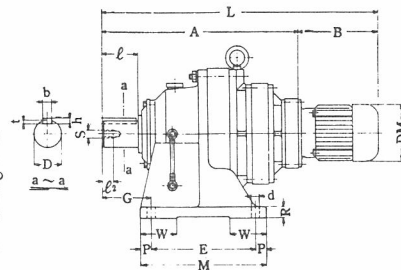


H 形

①～⑧項の寸法図

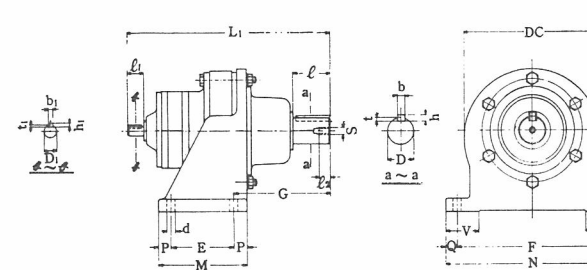

HM 形



項	低 速 軸 定格トルク kg-m	形 式	電 動 機		C	DC	E	F	G	M	N	P	Q	R	V	W	d	低 速 軸 々				端 寸 法				電 動 機 直 結 形 (HM形)						両 軸 形 (H 形)						項
			kW	r p m														D	b	h	t	ℓ	S	ℓ ₂	A	B	DM	L	重量(kg)	D ₁	b ₁	h ₁	t ₁	ℓ ₁	L ₁	重量(kg)		
1	1.5	HM・H 005-4999	0.05	1500	80	114	80	140	40	104	164	12	12	12	32	—	9	15	5	5	3	20	—	—	163	177	114	340	15	10	4	4	2.5	15	220	10	1	
2		HM・H 01-4999	0.1	1500	80	114	80	140	40	104	164	12	12	12	32	—	9	15	5	5	3	—	—	—	212	177	114	389	16	10	4	4	2.5	15	269	11	2	
3	5	HM・H 005-5199	0.05	1500	100	168	90	180	96	120	210	15	15	15	37	—	11	20	5	5	3	30	—	—	212	177	114	389	16	10	4	4	2.5	15	269	11	3	
4		HM・H 01-5199	0.1	1500	100	168	90	180	96	120	210	15	15	15	37	—	11	20	5	5	3	—	—	—	239	177	114	416	28	10	4	4	2.5	15	296	23	4	
5	15	HM・H 005-5299	0.05	1500	100	168	90	180	100	120	210	15	15	15	37	—	11	30	7	7	4	35	—	—	239	177	114	416	28	10	4	4	2.5	15	296	23	5	
6		HM・H 01-5299	0.1	1500	100	168	90	180	100	120	210	15	15	15	37	—	11	30	7	7	4	—	—	—	278	177	114	455	45	10	4	4	2.5	15	335	40	6	
7	30	HM・H 005-5399	0.05	1500	140	252	100	250	150	150	290	25	20	20	55	—	14	40	10	8	4.5	55	—	—	278	177	114	455	45	10	4	4	2.5	15	335	40	7	
8		HM・H 01-5399	0.1	1500	140	252	100	250	150	150	290	25	20	20	55	—	14	40	10	8	4.5	—	—	—	347	177	114	524	59	10	4	4	2.5	15	404	54	8	
9	60	HM・H 005-5419	0.05	1500	150	230	145	290	100	195	330	25	20	22	65	—	18	50	12	8	4.5	70	M10	18	347	177	114	524	59	10	4	4	2.5	15	404	54	9	
10		HM・H 01-5419	0.1	1500	150	230	145	290	100	195	330	25	20	22	65	—	18	50	12	8	4.5	—	—	—	414	177	114	591	88	10	4	4	2.5	15	471	83	10	
11	120	HM・H 005-5619	0.05	1500	160	320	150	370	139	238	410	44	20	25	75	—	18	60	15	10	5	90	M10	18	414	177	114	591	88	10	4	4	2.5	15	471	83	11	
12		HM・H 01-5619	0.1	1500	160	320	150	370	139	238	410	44	20	25	75	—	18	60	15	10	5	—	—	—	453	169	144	622	139	15	5	5	3	25	514	130	12	
13	—	HM・H 02-5631	0.2	1500	160	320	150	370	139	238	410	44	20	25	75	—	18	60	15	10	5	—	—	—	453	169	144	622	139	15	5	5	3	25	514	130	13	
14	225	HM・H 005-5729	0.05	1500	200	340	275	380	125	335	430	30	25	30	64	95	22	70	18	12	6	90	M12	24	475	177	114	652	125	10	4	4	2.5	15	532	120	14	
15		HM・H 01-5729	0.1	1500	200	340	275	380	125	335	430	30	25	30	64	95	22	70	18	12	6	—	—	—	500	169	144	669	170	15	5	5	3	25	561	160	15	
16	—	HM・H 02-5731	0.2	1500	200	340	275	380	125	335	430	30	25	30	64	95	22	70	18	12	6	—	—	—	500	169	144	669	170	15	5	5	3	25	561	160	16	
17	—	HM・H 05-5731	0.4	1500	200	340	275	380	125	335	430	30	25	30	64	95	22	70	18	12	6	—	—	—	500	210	146	710	170	15	5	5	3	25	561	160	17	
18	300	HM・H 005-5839	0.05	1500	220	370	320	420	145	380	470	30	25	30	73	95	22	80	20	13	7	110	M12	24	530	177	114	707	178	10	4	4	2.5	15	587	173	18	
19		HM・H 01-5839	0.1	1500	220	370	320	420	145	380	470	30	25	30	73	95	22	80	20	13	7	—	—	—	530	177	114	707	178	10	4	4	2.5	15	587	173	19	
20	—	HM・H 02-5831	0.2	1500	220	370	320	420	145	380	470	30	25	30	73	95	22	80	20	13	7	—	—	—	542	169	144	711	200	15	5	5	3	25	603	190	20	
21	—	HM・H 05-5831	0.4	1500	220	370	320	420	145	380	470	30	25	30	73	95	22	80	20	13	7	—	—	—	542	210	146	752	200	15	5	5	3	25	603	190	21	
22	600	HM・H 02-5931	0.2	1500	250	430	380	480	155	440	530	30	25	35	73	95	22	95	24	16	8	120	M20	34	605	169	144	774	285	15	5	5	3	25	666	275	22	
23		HM・H 05-5931	0.4	1500	250	430	380	480	155	440	530	30	25	35	73	95	22	95	24	16	8	—	—	—	605	210	146	815	285	15	5	5	3	25	666	275	23	
24	—	HM・H 1-5931	0.75	1500	250	430	380	480	155	440	530	30	25	35	73	95	22	95	24	16	8	—	—	—	605	235	176	840	293	15	5	5	3	25	666	275	24	
25	1000	HM・H 02-6041	0.2	1500	290	505	480	560	185	560	620	40	30	40	80	105	26	110	28	18	9	140	M20	34	714	169	144	883	400	15	5	5	3	25	775	390	25	
26		HM・H 05-6041	0.4	1500	290	505	480	560	185	560	620	40	30	40	80	105	26	110	28	18	9	—	—	—	714	210	146	924	400	15	5	5	3	25	775	390	26	
27	—	HM・H 1-6041	0.75	1500	290	505	480	560	185	560	620	40	30	40	80	105	26	110	28	18	9	—	—	—	714	235	176	949	408	15	5	5	3	25	775	390	27	
28	1500	HM・H 02-6161	0.2	1500	325	575	500	630	230	600	690	50	30	40	95	150	26	120	32	20	10	150	M24	42	805	169	144	974	595	15	5	5	3	25	866	585	28	
29		HM・H 05-6161	0.4	1500	325	575	500	630	230	600	690	50	30	40	95	150	26	120	32	20	10	—	—	—	805	210	146	1015	595	15	5	5	3	25	866	585	29	
30	—	HM・H 1-6163	0.75	1500	325	575	500	630	230	600	690	50	30	40	95	150	26	120	32	20	10	—	—	—	805	235	176	1063	660	15	5	5	3	35	898	645	30	
31	—	HM・H 2-6163	1.5	1500	325	575	500	630	230	600	690	50	30	40	95	150	26	120	32	20	10	—	—	—	805	280	176	1108	665	15	5	5	3	35	898	645	31	
32	2500	HM・H 1-6283	0.75	1500	420	720	330	800	322	810	880	75	40	50	140	—	33	140	35	22	11	150	M30	52	1060	235	176	1295	1136	18	5	5	3	35	1130	1220	32	
33		HM・H 2-6283	1.5	1500	420	720	330	800	322	810	880	75	40	50	140	—	33	140	35	22	11	—	—	—	1060	280	176	1340	1140	18	5	5	3	35	1130	1220	33	
34	5000	HM・H 1-6393	0.75	1500	540	950	420	1050	415	1040	1160	100	55	60	200	—	39	180	42	26	13	150	M30	52	1373	235	176	1608	2535	18	5	5	3	35	1443	2520	34	
35		HM・H 2-6393	1.5	1500	540	950	420	1050	415	1040	1160	100	55	60	200	—	39	180	42	26	13	—	—	—	1373	280	176	1653	2540	18	5	5	3	35	1443	2520	35	
36	—	HM・H 3-6393	2.2	1500	540	950	420	1050	415	1040	1160	100	55	60	200	—	39	180	42	26	13	—	—	—	1373	295	230	1668	2560	18	5	5	3	35	1443	2520	36	