


D05260-F

質量  
APPROX.MASS: 11 kg

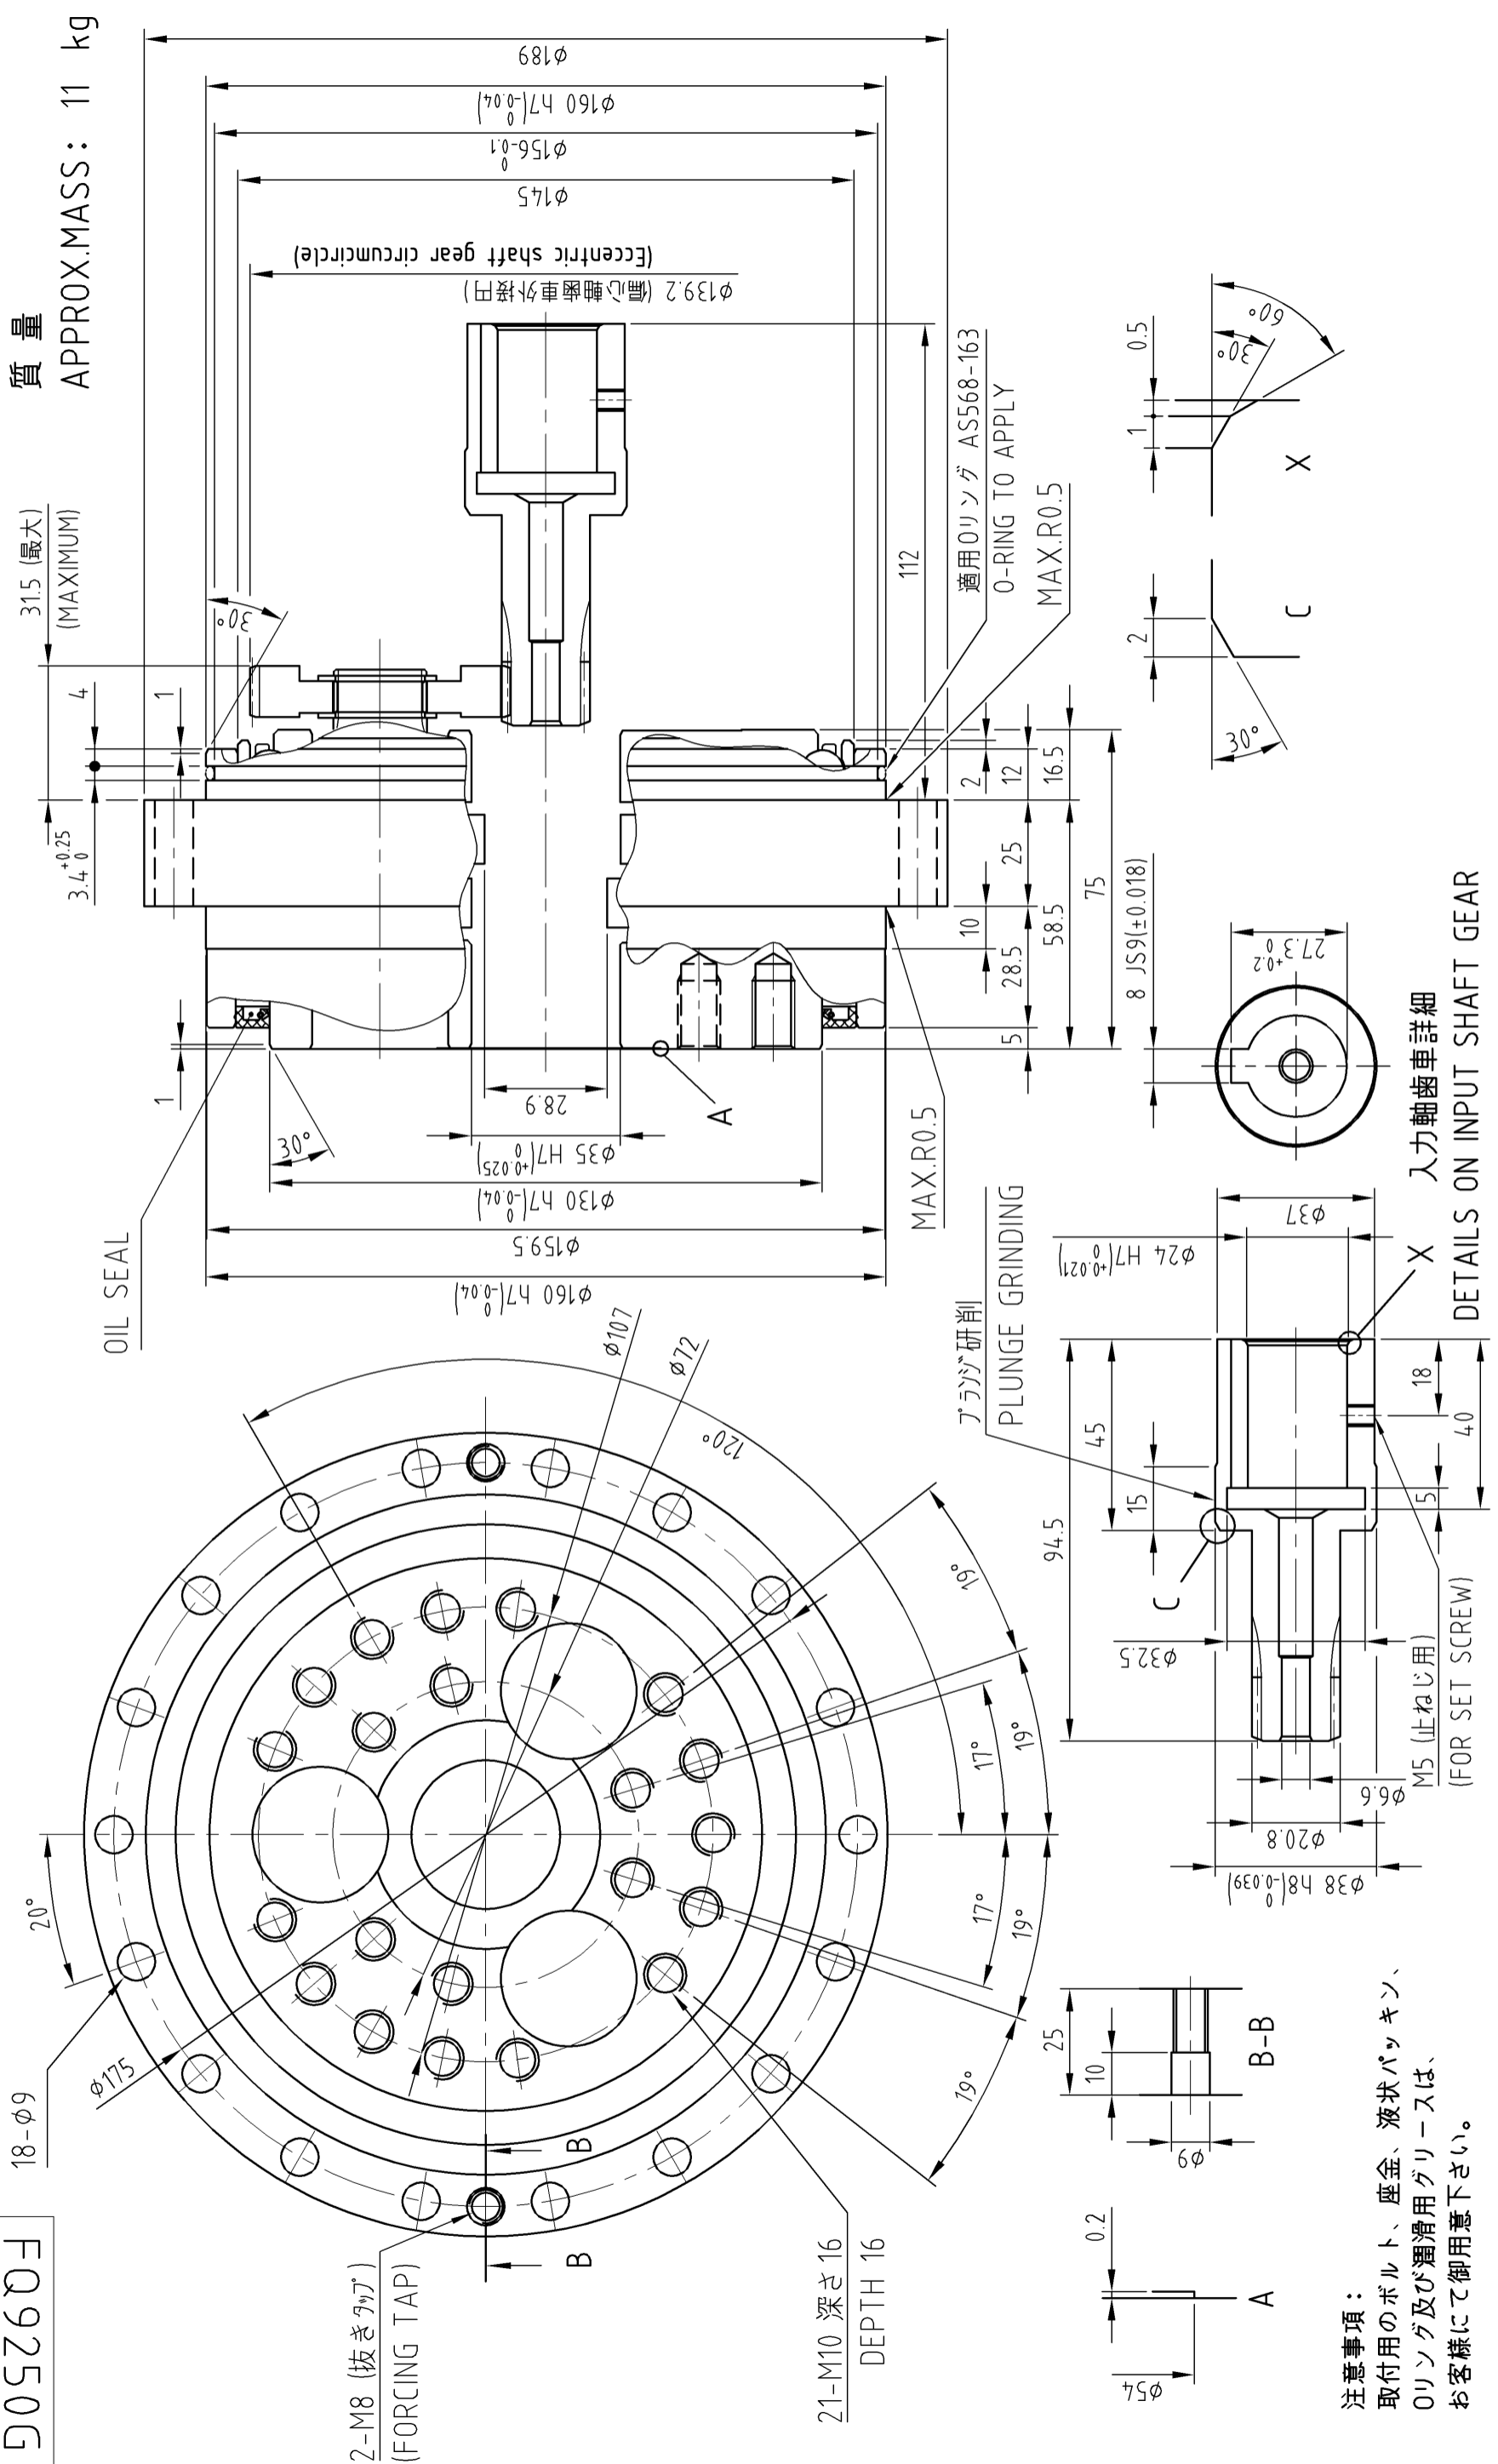

2-M18 (抜きタッパ)  
(FORCING TAP)

21-M10 深さ16  
DEPTH 16

18-φ9

φ175

φ107

φ72

φ159.5

φ130 H7(+0.04)

φ160 H7(+0.04)

φ156.01

φ145

φ189

31.5 (MAXIMUM)

3.4 +0.25

4

1

28.9

10

5

28.5

58.5

75

16.5

2

12

112

適用Oリング AS568-163

O-RING TO APPLY

MAX.R0.5

MAX.R0.5

DETAILS ON INPUT SHAFT GEAR

入力軸歯車詳細

M5 (止ねじ用)  
(FOR SET SCREW)

プラズマ研削

PLUNGE GRINDING

φ24 H7(+0.021)

φ37

φ32.5

φ6.6

φ20.8

φ38 H8(+0.039)

φ57

φ9

0.2

25

10

18

4.0

15

4.5

94.5

17°

17°

19°

19°

19°

19°

120°

30°

30°

30°

60°

30°

0.5

1

2

φ139.2 (偏心軸歯車外接円)

(Eccentric shaft gear circumscribe)

OIL SEAL

Precautions:  
Prepare bolts for mounting, washers, liquid gasket, O-ring, and grease for lubrication by customers.

CUSTOMER	WORK.NO.	ITEM.NO.	USE ORDER NO.	Q'TY	SET	SHI MANUF.NO.
X04500G_00						
SCALE	Y.Miura	DATE	Aug.22.2022	F4CF -UA35-121		
INSPECTION		APPROVER	Y.Tsurumi	CYCLO DRIVE		
REV. 1	REWRITE DRAWING EJ	DATE	Aug.22.2022	OUTLINE DRAWING		
				DRAW. NO. IF Q 9 2 5 0 I G I		

Sumitomo Drive Technologies  
Sumitomo Heavy Industries, Ltd.