


OUTSIDE DIMENSIONS

Dimensions
in mm

操作パネル

Digital Operator Panel

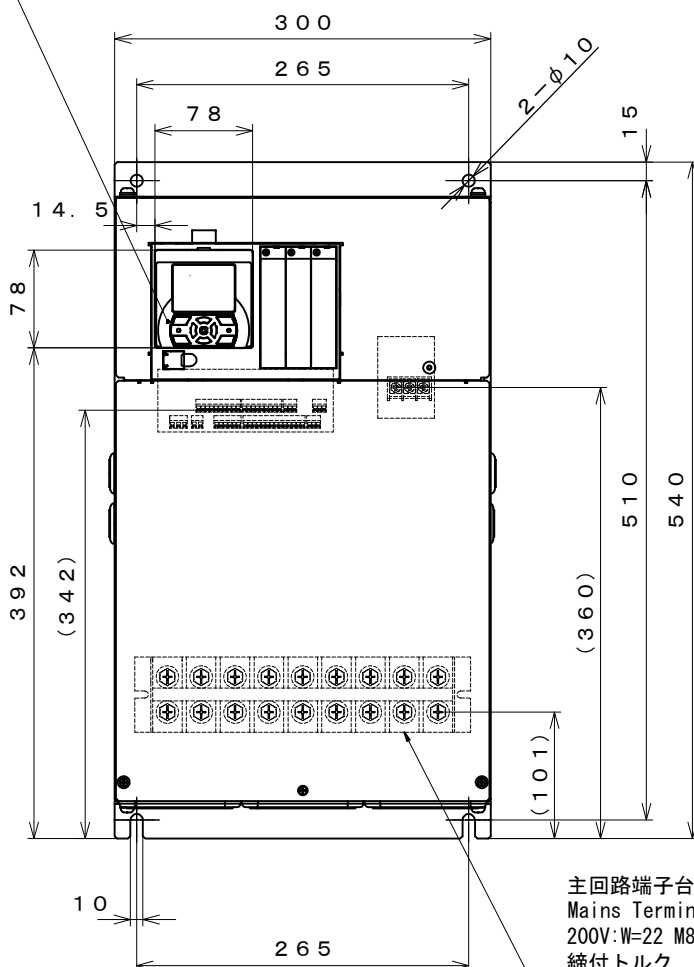

主回路端子台
Mains Terminal

200V: W=22 M8, 400V: W=22 M6

締め付けトルク

Tightening Torque

200V: 6 N・m

400V: 2.5~3.0 N・m

配線穴
Cable Holes
3-82×25

制御電源端子台

Control Power Supply Terminal

W=9.8 M4

締め付けトルク

Tightening Torque 1.2~1.4 N・m

制御回路端子台
Control Terminal


配線穴(両側面)

Cable Holes (Both Sides)

2-φ20×2


排気

Exhaust

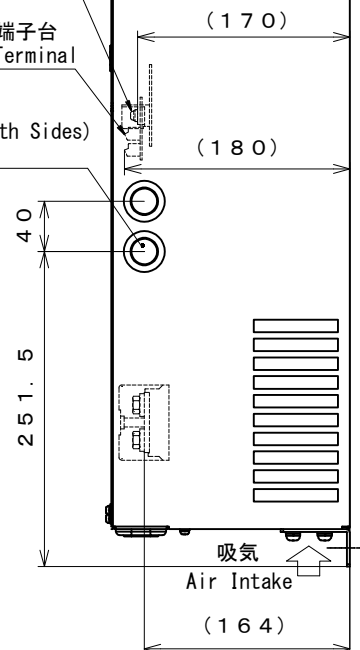

許容スペース

Minimum allowable space

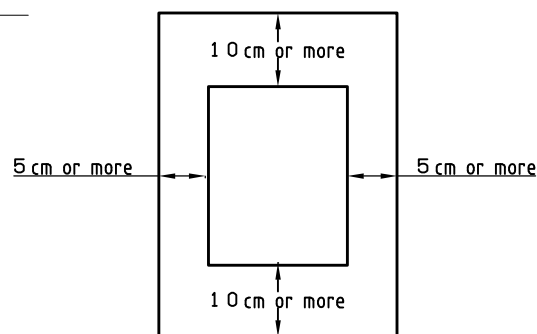

Mass: 22kg

HF4322-030

HF4324-030

ご注文主:
Customer:



製番:
Manuf. No.:



台数:
On Order:



Inverter

HF-430NEO
30kW/3φ 200V
30kW/3φ 400V

Sumitomo Drive Technologies

Sumitomo Heavy Industries, Ltd.

DWG. No. JT579AW

DATE MAR. 20. 2020